


# PICO830

Intel® Atom™ N2600/ N2800 Pico-ITX SBC with Intel® NM10 Chipset, LVDS/ DisplayPort or VGA, LAN and Audio

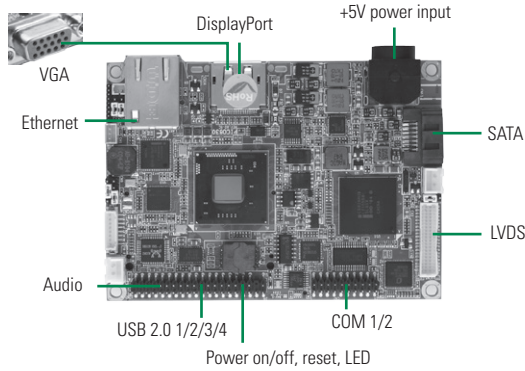

## System

CPU	Intel® Atom™ processor N2800 1.86 GHz/ N2600 1.6 GHz dual core onboard
System Memory	1 x 204-pin SO-DIMM supports DDR3-800/1066 max. up to 4 GB (N2600 supports DDR3 800 max. up to 2 GB)
Chipset	Intel® NM10
BIOS	AMI UEFI BIOS
SSD	1 x CFast™
Watchdog Timer	255 levels, 1 ~ 255 sec.
Expansion Interface	N/A
Battery	Lithium 3V/220MAH
Power Input	DC power jack connector +5V DC-in only AT Auto Power On function supported
Power Requirements	Intel® Atom™ N2800 @ 1.86 GHz, 1 GB DDR3 Max. RMS: +5V @ 3A Intel® Atom™ N2600 @ 1.6 GHz, 1 GB DDR3 Max. RMS: +5V @ 2.7A
Size	100 x 72 mm
Board Thickness	1.6 mm
Operating Temperature	0°C ~ +60°C (32°F ~ 140°F), operation
Relative Humidity	10% ~ 95% relative humidity, non-condensing

## I/O


MIO	1 x RS-232/422/485 1 x RS-232
SATA	1 x SATA-300
Hardware Monitoring	Detect CPU/system temperature and voltage
Ethernet	1 port as 10/100/1000 Mbps supports Wake-on-LAN, RPL/PXE Boot ROM with Intel® 82583V
Audio	HD Codec audio as MIC-in/Line-out with Realtek ALC662
USB	4 x USB 2.0
SMBus	System Management Bus for advanced monitoring/control
Digital I/O	N/A

## Display

Chipset	Intel® GMA 3650 graphics core for N2800 Intel® GMA 3600 graphics core for N2600
Memory Size	Share system memory
Display Interface	1 x VGA or 1 x DisplayPort 1 x LVDS; 18/24-bit single/dual channel

## Features

- Intel® Atom™ processor N2800 (1.86 GHz)/ N2600 (1.6 GHz)
- 1 DDR3 SO-DIMM supports up to 4 GB memory capacity
- 4 USB 2.0 ports
- 2 COM ports
- Display: LVDS, DisplayPort

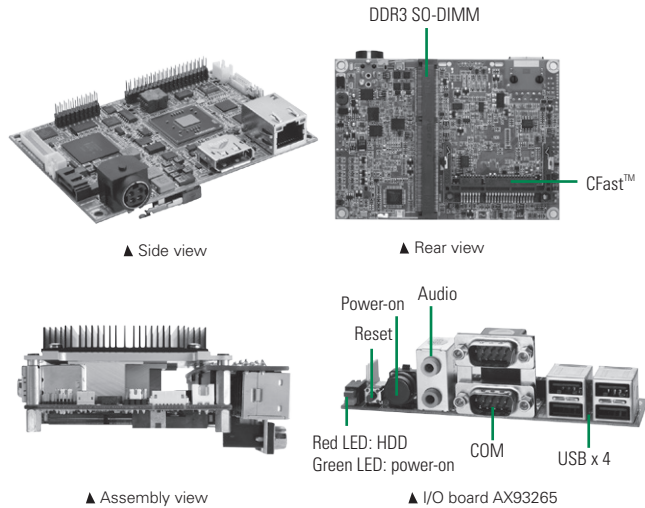

## Packing List

### Standard

Quick installation guide, user's manual/utility CD and accessories

### Accessories

Part Number	Description	Qty
85932651000E	AX93265 I/O board	1
594PICO8200E	DC power cable	1
594K5328200E	SATA+power wire cable L=60mm	1
5078H830000E	Heatspreader	1
5078H100200E	Heatsink	1

### Optional

Part Number	Description
59040131000E	DisplayPort to DVI cable, L=220 mm
59050203000E	DisplayPort to HDMI cable, L=185 mm
59091501000E	DisplayPort to DisplayPort cable, L=1500 mm
594H8302800E	USB CABLE 20x2P P=2.0 L=200 mm
594H8303000E	AUDIO CABLE 20x2P P=2.0 L=200 mm
594H8301600E	Power/Reset button + LED CABLE
594H8302100E	COM CABLE 10x2P P=2.0 L=200 mm
59340000200E	USB+AUDIO+LED CABLE L=200 mm

## Ordering Information

### Standard

PICO830VGA-N2600	Pico-ITX SBC with Intel® Atom™ processor N2600 1.6 GHz, (P/N: E38H830100) VGA/LVDS, 1 10/100/1000Mbps, 2 COM and audio
PICO830PGA-N2600	Pico-ITX SBC with Intel® Atom™ processor N2600 1.6 GHz, (P/N: E38H830102) DisplayPort/LVDS, 1 10/100/1000Mbps, 2 COM and audio
PICO830VGA-N2800	Pico-ITX SBC with Intel® Atom™ processor N2800 1.8 GHz, (P/N: E38H830101) VGA/LVDS, 1 10/100/1000Mbps, 2 COM and audio
PICO830PGA-N2800	Pico-ITX SBC with Intel® Atom™ processor N2800 1.8 GHz, (P/N: E38H830103) DisplayPort/LVDS, 1 10/100/1000Mbps, 2 COM and audio

SBC  
Services  
and Solutions

Systems  
on  
Modules

Embedded  
SBCs  
>EPIC

Embedded  
SBCs  
>3.5" Capa

Embedded  
SBCs  
>Nano-ITX

Embedded  
SBCs  
>Pico-ITX

Embedded  
SBCs  
>PC/104

Industrial  
Mother-  
boards

Slot  
CPU  
Cards

Accessories

Appendix